




PORTABLE AXLE WEIGHER

Rugged, But Light Enough For Easy Transport.

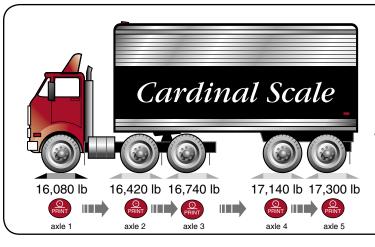


FACTORING AXLE WEIGHT

After each axle is weighed, simply press the **PRINT** key on the weight indicator to accumulate each axle's weight. Press the asterisk (*) and the **PRINT** key for total weight.

83680 Ib TOTAL











Simply remove the interlocking rubbber ramps and the lightweight axle pads are completely portable.



SPECIFICATIONS

Ramp:

Model Number: CWL-40 (contains 2 platforms and 2 sets of ramps)

20,000 lb (9,000 kg) per platform or 40,000 lb (18,000 kg) for Capacity:

single axle

20 lb

Division Size: 24" L x 14" W (61 cm L x 36 cm W) weighing surface Platform Size: 28" L x 17.5" W x 1.7" H (72 cm L x 45 cm W x 4 cm H) Overall Size:

Interlocking, slip-resistant rubber ramps measure 28" L x 10"

W (71 cm L x 25 cm W)

60 lbs (27 kg) per platform Weight: Safe Overload: 150% of capacity Max. Resolution: 1,000 divisions Input Resistance: 750 ohms

Accuracy: The greater of +/-0.3% of applied load or 1 division

FEATURES

- Low-profile (1.75 inch/44mm high) design with integral transport handle
- Six strain gauge load cell design
- Large enough to weigh dual axles
- Corrosion resistant
- Interlocking rubber ramps
- Optional cigarette lighter adapter and clamps for car battery adapter

Typical system configuration may include: CWL-40, 215 indicator, and P150 batteryoperated tape printer.

Cardinal Scale reserves the right to improve, enhance, or modify features and specifications without prior notice.

Cardinal Scale Manufacturing Co. 203 E. Daugherty, Webb City, MO 64870 USA

Ph: 417-673-4631 or 800-441-4237 • Fax: 417-673-5001

www.CardinalScale.com

Sold By: